


HELPFUL
TIPS



FROMM | PACKAGING
SYSTEMS

How to strap with


POLYPROPYLENE STRAPPING

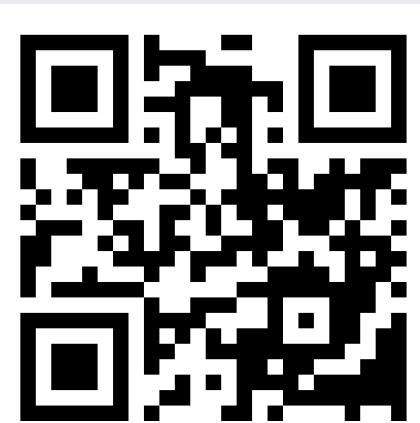

HELPFUL TIPS



YOU NEED
STRAPPING ROLL

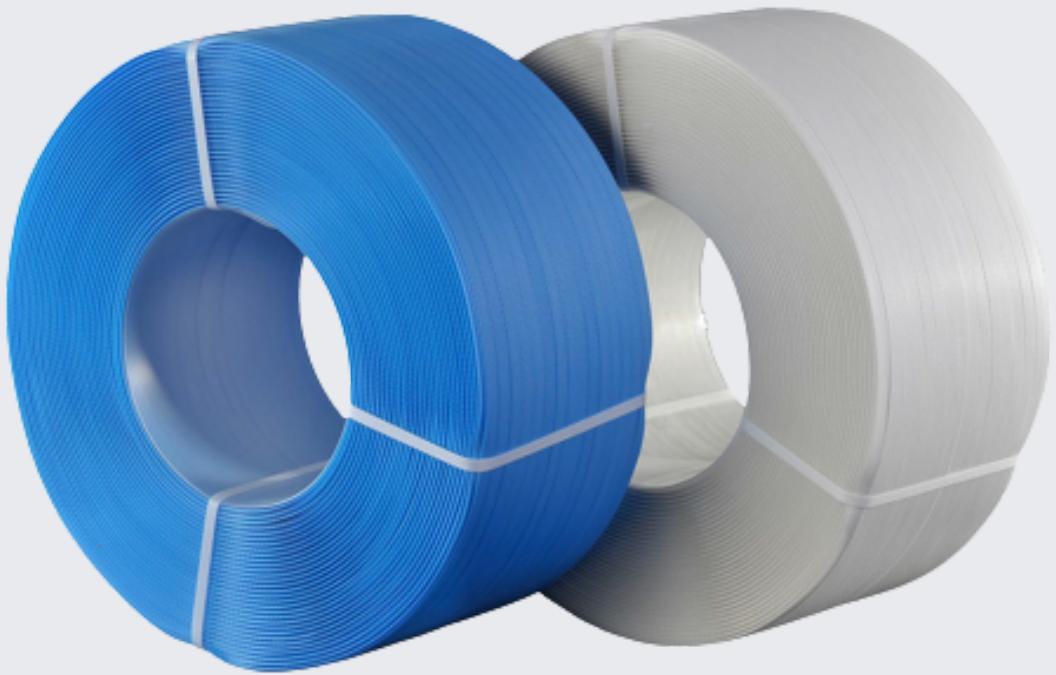

- **Strapping made of polypropylene is versatile and affordable.**
- **Ideal for light to medium-duty packages and loads in factories and warehouses.**
- **Due to its lighter weight than steel, polypropylene straps are more easy, secure, and affordable to use.**
- **Available in 1/2", 5/8", 3/4" strap widths.**

HELPFUL TIPS



TENSION

- When strapping a load, start by encircling the package with both strapping ends.
- The strapping should be layered with the end close to your body just on bottom.
- Next, press the base handle and tension lever together.
- Allow 5" of strapping at the front of the tool then insert the bottom strap under the gripper plate cutter wheel.
- Feed the upper strap through the cutter wheel after releasing the base and tension lever and through the windlass slot, tighten the strapping as much as you can.
- Continue tensioning the strapping to the desired level by moving the tension lever back and forth.



FPT-34
STANDARD DUTY



FPT-1100
STANDARD DUTY



FPT-320
HEAVY DUTY

HELPFUL TIPS



FPS-48L
STANDARD DUTY



SEAL

- Place the open seals over both strapping ends, positioning the seal with the open side down.
- Close the sealer's nose around the seal and crimp the strapping tightly .
- To cut the strapping, press the tension lever and base handle together, then slide the tensioning tool to the right.



OPEN SEALS
S40- S50-S60



FPS-1225
HEAVY DUTY

HELPFUL
TIPS



**Follow us to see more
content like this.**

BUY NOW

